





Buy one, Enjoy all

CSB6 series ceiling speaker , CSB6 series is a 2-way design featuring a 6.5" aluminum/ woven fiberglass/ PP cone mid/ bass driver and a 1" aluminum or silk tweeter in a neat circle chassis, incorporating quick and easy swing-out dog fixings. CSB6 series is a perfect speaker with concise and trendy outer appearance for those indulgent extra locations-the bathroom, the kitchen-that define the real luxury of custom installed audio.

Technical Specification

Description	2-way ceiling speaker system with treble. Contour switch to cut or boost the high frequencies
Woofer	CSB6-AL with 6.5" aluminum cone rubber-edge CSB6-FG with 6.5" woven fiberglass cone rubber-edge CSB6-PP with 6.5" polypropylene cone rubber-edge
Tweeter	CSB6-AL/FG with 1" aluminum dome tweeter CSB6-PP with 1" silk dome tweeter
Frequency response	60Hz- 20KHz
Sensitivity	88dB SPL (2.83V, 1m)
Nominal impedance	8 Ohm
Power	60 W RMS
Crossover slope	12 dB/octave
Hole cut out dimension	198mm(7.8 in) x 81mm(3.2 in)
Weight	1.21kg (2.67 lb)

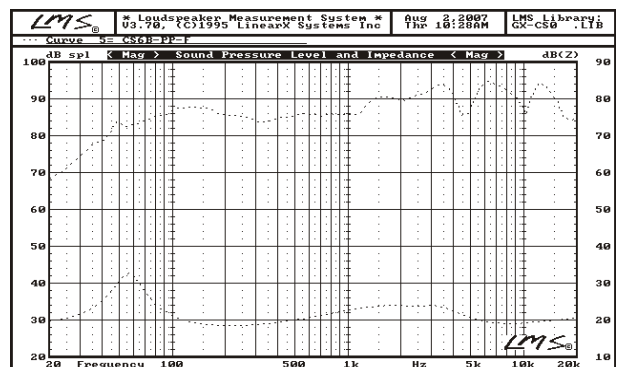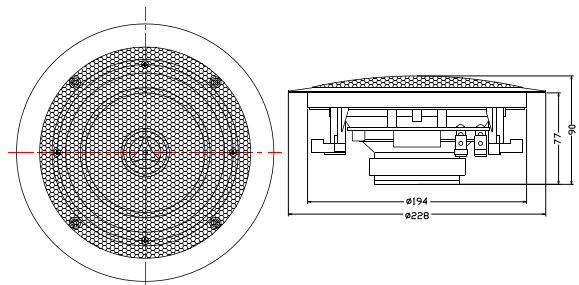

TECHNICAL DATA ARE MEASURED WITH LMS-EQUIPMENT ACCORDING EN-60268-5.

FOR PRODUCT IMPROVEMENT FDCAUDIO RESERVES ALTERATIONS IN SPECIFICATIONS AND DESIGN WITHOUT FURTHER ANNOUNCEMENT FOR TOLERANCES OF TECHNICAL DATA REFER TO FDCAUDIO'S MANUAL OF TECHNICAL DATA

FOR INFORMATION CONTACT: TEL.:+86-592-2076023, FAX.:+86-592-2033445, E-MAIL:mengqi@fdcaudio.com